


Bild / Picture

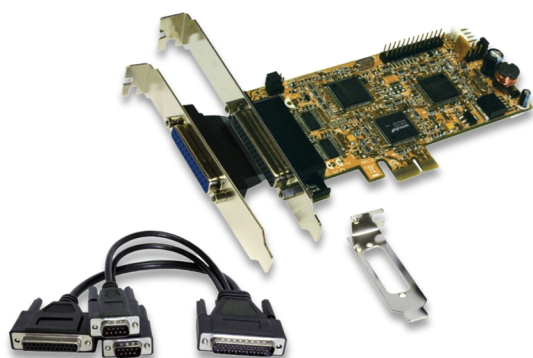


2 Seriell RS-232 / 2 Parallel Multi I/O PCIe Karte (ASIX Chip-Set)

Beschreibung

Die EX-44344 PCIe Multi I/O Karte stellt zwei serielle RS-232 High Performance UART 16C550 und zwei Parallele EPP/ECP Ausgänge zur Verfügung. Sie ist entwickelt worden um zwei weitere Serielle Ausgänge sowie zwei Parallelen Centronics Ausgänge für PC, kleine Workstation oder Server über den PCIe Bus zu erweitern. +5V und +12V sind auf Pin 9 des seriellen Stecker konfigurierbar POS System (Power over System). Mit der EX-44344 wird ein Low Profile Bügel mitgeliefert damit die Karte auch in schmales PC Gehäuse bis 8 cm Höhe eingebaut

Anwendung / Application

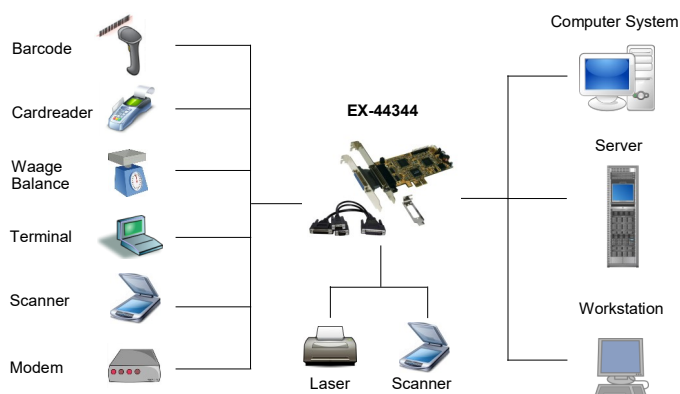

2 Serial RS-232 / 2 Parallel Multi I/O PCIe card (ASIX Chip-Set)

Description

The EX-44344 PCIe Multi I/O card provides two serial RS-232 High Performance UART 16C550 and two parallel EPP/ECP output. It is designed to expand two additional serial outputs and two Parallel Centronics output for PCs, small workstations or servers over the PCIe bus. +5V and +12V are configurable on pin 9 of the serial connector POS system (Power over System). A low profile bracket is supplied with the EX-44344 so that the card can also be installed in narrow PC cases up to 8 cm high.

Merkmale

Features

• Schnittstelle: RS232 V.24 und Parallel Centronics EPP/ECP/SPP	• Interface: RS232 V.24 and Parallel Centronics EPP/ECP/SPP
• FIFO Buffer: 16C550 mit 256Byte	• FIFO Buffer: 16C550 with 256Byte
• ±15kV IEC1000-4-2 ESD Schutz für RS232 I/O's	• ±15KV IEC1000-4-2 ESD Protection for RS232 I/O's
• I/O Adressen und Interrupt wird vom System BIOS vergeben	• I/O addresses and Interrupt will set from the system BIOS, IRQ sharing
• Daten Bits: 5, 6, 7, 8	• Data Bits: 5, 6, 7, 8
• Stop Bits: 1, 1.5, 2	• Stop bits: 1, 1.5, 2
• Parity: none, even, odd, space, mark	• Parity: none, even, odd, space, mark
• Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND	• Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
• +5V und +12V ist auf Pin 9 vom Seriellen Stecker einstellbar	• +5V and +12V is adjustable on pin 9 of the serial connector

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	ASIX MCS9901CV	Chip-Set:	ASIX MCS9901CV
Datentransfer-Rate:	300Baud bis 115.2KBaud	Data transfer rate:	300Baud up to 115.2KBaud
Anschlüsse:	2 x 9 Pin Seriell RS-232 Stecker (Octopus Kabel) 2 x 25 Pin Parallel Buchse mit Slot-Adapter 1 x 4 Pin Strom Floppy-Stecker	Connectors:	2 x 9 pin serial RS-232 male (Octopus cable) 2 x 25 pin parallel female with slot adapter 1 x 4 pin power connector
Hardwaresysteme:	PCIe x1 bis x16 Slot	Hardware system:	PCIe x1 to x16 slot
Treiber:	Win98SE/ ME/ XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64-Bit) Linux 2.4 oder höher, Mac OS 10.x	Driver:	Win98SE/ ME/ XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64-Bit) Linux 2.4 oder höher, Mac OS 10.x
Betriebssysteme:	Gemäß Treiber	Operating systems:	In accordance with driver
Betriebstemperatur :	0°C bis +55°C Celsius	Operating temperature :	32°F up to 131°F Fahrenheit
Lagertemperatur:	-40°C bis +75°C Celsius	Storage temperature:	-40°F up to 167°F Fahrenheit
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	+3.3Volt über den PCIe-Slot	Current Supply:	+3.3V over the PCIe-slot
Abmessung:	120.00 x 66.00 mm	Size:	120.00 x 66.00 mm
Gewicht:	550 g	Weight:	550 g
EAN:	4718359443442	EAN:	4718359443442
Ursprungsland:	Taiwan	Country of origin:	Taiwan
Lieferumfang:	EX-44344, Octopus Kabel, 1 x Slot Kabel 25 Pin Low Profile Bügel, Treiber CD, Handbuch	Packaging contents:	EX-44344, Octopus cable, 1 x Slot cable 25 pin Low Profile bracket, Driver CD, Manual