

Bild / Picture




USB 3.2 Gen1 Mini PCIe Karte mit 2 Ports (NEC Chipsatz)

Beschreibung

Die EX-48010-3 USB 3.2 Gen 1 Mini PCIe Karte erweitert Ihr System um zwei SuperSpeed USB 3.2 Gen 1 Ports. Alternativ kann der interne 19-Pin Pfostenstecker für interne Verbindungen genutzt werden. Sie unterstützt USB 1.1 Low-Speed (1.5Mbps), Full-Speed (12Mbps), USB 2.0 High-Speed (480Mbps) und USB 3.2 Gen 1 SuperSpeed (5Gbps) und eignet sich für jedwede USB-Verbindung wie externe Speichergehäuse, Webcams, Drucker, Scanner und mehr. Die Karte wird vom Rechner über den Floppy-Anschluss mit Strom versorgt und stellt pro Port 900 mA zur Verfügung.

Merkmale

Anwendung / Application

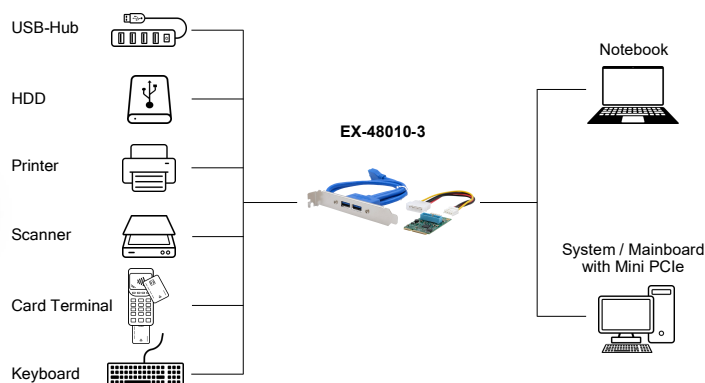

USB 3.2 Gen 1 Mini PCIe board with 2 ports (NEC chipset)

Description

The EX-48010-3 USB 3.2 Gen 1 Mini PCIe card adds two SuperSpeed USB 3.2 Gen 1 ports to your system. Alternatively, the internal 19-pin header can be used for internal connections. It supports USB 1.1 Low-Speed (1.5Mbps), Full-Speed (12Mbps), USB 2.0 High-Speed (480Mbps) and USB 3.2 Gen 1 SuperSpeed (5Gbps) and is suitable for any USB connection such as external storage enclosures, webcams, printers, scanners and more. The card is powered by the computer via the floppy connector and provides 900mA per port.

Features

• USB 3.2 Gen 1 Mini PCIe Karte mit zwei Anschlüssen	• USB 3.2 Gen 1 Mini PCIe card with two ports
• Kompatibel zu Microsoft Windows Standard Open HCD Treiber und Intels eXtensible Host Controller Interface (xHCI)	• Compatible with Microsoft Windows Standard Open HCD driver and Intels eXtensible Host Controller Interface (xHCI)
• Unterstützt bis zu 123 Geräte	• Supports up to 123 devices
• Vollständig konform mit PCI Express 2.0 Spezifikationen	• Fully compliant with PCI Express Gen2 specifications
• Abwärtskompatibel zu USB 1.1 und 2.0	• Backward compatible with USB 1.1 and 2.0
• Hot Swapping	• Hot swapping
• Plug & Play	• Plug & Play
• Standard Profile Bügel mit 2 Ports wird mitgeliefert	• Standard Profile bracket with 2 ports included

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chipsatz:	NEC720202	Chipset:	NEC720202
Datentransfer-Rate:	Low-Speed (1.5 Mbps) / Full-Speed (12 Mbps) High-Speed (480 Mbps) Super-Speed (5 Gbps)	Data transfer rate:	Low-Speed (1.5Mbps) / Full-Speed (12Mbps) High-Speed (480Mbps) Super-Speed (5Gbps)
Anschlüsse:	19 Pin interner USB 3.2 Gen1 Anschluss für 2 Ports 1x 4 Pin Floppy Stromanschluss	Connectors:	19 pin internal USB 3.2 Gen1 connector for 2 ports 1x 4 pin floppy power connector
Hardwaresysteme:	Mini PCIe Slot	Hardware system:	Mini PCIe slot
Benötigt Treiber für:	Win XP/Vista/7 (32&64)	Needs driver for:	Win XP/Vista/7 (32&64)
Betriebssysteme:	Win XP/Vista/7/8.x/10/11 (32&64) Server 200x/2012R2/2016, Linux	Operating systems:	Win XP/Vista/7/8.x/10/11 (32&64) Server 200x/2012R2/2016, Linux
Betriebstemperatur :	0°C bis +55°C Celsius	Operating temperature :	32°F up to 131°F
Lagertemperatur:	-20°C bis +85°C Celsius	Storage temperature:	-4°F up to 185°F
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Abmessung:	30.00 x 51.00 mm	Size:	30.00 x 51.00 mm
Gewicht:	155 g	Weight:	155g
EAN:	4718359481024	EAN:	4718359481024
Ursprungsland:	China	Country of origin:	China
Lieferumfang:	EX-48010-3, Stromkabel, 19 Pin Adapterkabel mit Standard Bügel auf 2x USB-A, Treiber CD, Handbuch	Packaging contents:	EX-48010-3, power cable, 19 pin adapter cable with standard bracket to 2x USB-A, driver CD, manual

Erklärung USB Bezeichnungen und Geschwindigkeiten / Explanation USB lable and speed

Version	Bisherige Bezeichnung / Previous designation	Geschwindigkeit / Speed
1.1	—	12 Mbit/s.
2.0	—	480 Mbit/s.
3.2 Gen 1	3.1 Gen 1 / 3.0	5 GBit/s.
3.2 Gen 2	3.1 Gen 2	10 GBit/s.
3.2 Gen 2x2	—	20 GBit/s.

Bilder / Pictures

