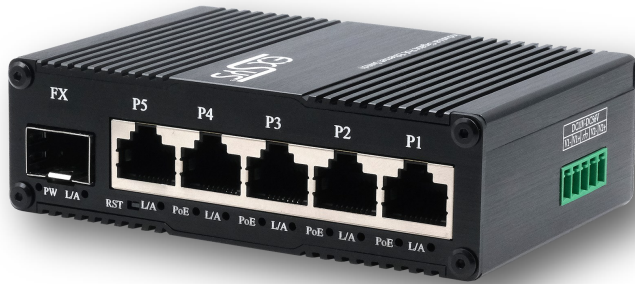


Bild / Picture

Web-Managed 5+1-Port Mini Gigabit Switch
mit Gigabit SFP Slot und PoE+


Beschreibung

Der kompakte industrietaugliche 6-Port Gigabit Web-Managed PoE-Switch EX-62030MPoE-SFP bietet trotz seiner geringen Ausmaße volle Gigabit Leistung an allen Ports. An vier der fünf RJ45-Ports stehen jeweils bis zu 30W für den Anschluss von PoE Powered Devices (PD) wie z.B. IP-Kameras oder IP-Telefone zur Verfügung. Der SFP-Slot ermöglicht die Einbindung in ein Glasfaser-Netzwerk. Passende SFP-Transceiver sind als Zubehör erhältlich. Die benutzerfreundliche Web-basierte Management-Benutzeroberfläche des EX-62030MPoE-SFP ermöglicht eine schnelle und bequeme Einrichtung, Konfiguration und Verwaltung, inklusive Konfigurationssicherungen und Firmware-Upgrades.

Merkmale

- 5x 10/100/1000Tx RJ45-Port, 1x 100/1000Fx SFP-Slot, auto detection
- **Web-Managed:** Browserbasierter Zugriff zur einfachen Installation und Verwaltung
- Stromversorgung von bis zu 4 PoE-fähigen Remote-Netzwerkgeräten, überträgt Daten und Strom über das gleiche Kabel
- Vollständig kompatibel mit IEEE 802.3af PoE (PSE) Type 1 = 15.40W und IEEE802.3at PoE+ (PSE) Type 2 = 34.20W
- Maximale abgegebene Leistung (PD): Type 1 = 12.95W / Type 2 = 25.50W
- Konform mit IEEE 802.3af/at Power Over Ethernet (PoE), Mode/Alternative B
- Auto-MDI/MDIX macht Crossover-Kabel überflüssig
- Unterstützt Auto-Negotiation und 10/100Mbps Halb-/Voll duplex und 1000Mbps Voll duplex
- Unterstützt Jumbo Frames bis 16kBytes
- Terminal Block für redundanten DC-Eingang, 2x 12 V bis 48 VDC
- Robustes, sehr kompaktes Metallgehäuse, IP40
- Inkl. DIN-Rail Kit und Wandmontagebügel
- Erweiterter Betriebstemperaturbereich von -40°C bis +75°C

Anwendung / Application

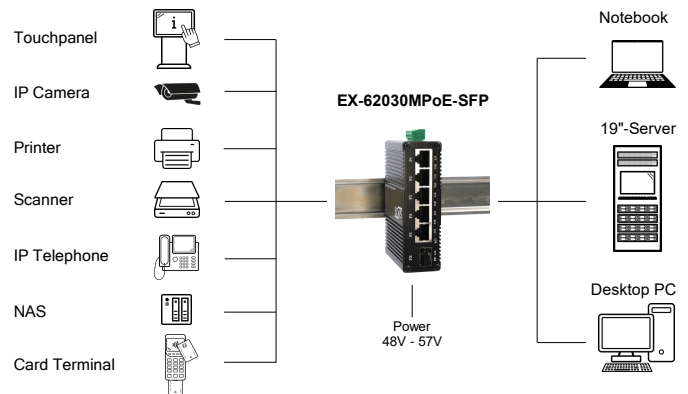Web-Managed 5+1-Port Mini Gigabit Switch
with Gigabit SFP slot and PoE+

Description

The compact, industrial-grade 6-port Gigabit web-managed PoE switch EX-62030MPoE-SFP offers full Gigabit performance on all ports despite its small external dimensions. Up to 30W is available on four of the five RJ45 ports for connecting PoE-powered devices (PD) such as IP cameras or IP telephones. The SFP slot enables integration into a fibre optic network. Suitable SFP transceivers are available as accessories. The user-friendly, web-based management interface of the EX-62030MPoE-SFP allows for quick and convenient setup, configuration and management, including configuration backups and firmware upgrades.

Features

- 5x 10/100/1000T RJ45-Port, 1x 100/1000X SFP slot, auto detection
- **Web-managed:** Browser-based access for easy installation and management
- Power up to 4 PoE-capable remote network devices, transfers data and power on one single cable
- Fully IEEE 802.3af compliant PoE (PSE) type 1 = 15.40W and IEEE802.3at PoE+ (PSE) type 2 = 34.20W
- Maximum power delivered (PD): Type 1 = 12.95W / Type 2 = 25.50W
- Compliant with IEEE 802.3af/at Power Over Ethernet (PoE), Mode/Alternative B
- Auto-MDI/MDIX eliminates the need for crossover cables
- Supports auto-negotiation and 10/100Mbps half/full duplex and 1000Mbps full duplex
- Supports jumbo frames up to 9kBytes
- Terminal block for redundant DC input, 2x 12V to 48VDC
- Rugged, very compact metal housing, IP40
- Includes DIN-Rail Kit and wall mounting bracket
- Extended operating temperature range from -40°C to +75°C

System / OS



Geprüft / Approved



Verpackung / Packaging



Spezifikation

Specification


Datentransfer-Rate:	10/100/1000 Mbit/s	Data transfer rate:	10/100/1000 Mbit/s
Anschlüsse:	5x RJ45-Buchse 1x SFP-Buchse, auto detection 1x Terminal Block +12V bis +48V	Connectors:	5x RJ45 Port 1x SFP slot, auto detection 1x Terminal Block +12V to +48V
Hardwaresysteme:	Ethernet 10/100/1000Mbps, SFP 100/1000Mbps	Hardware system:	Ethernet 10/100/1000Mbps, SFP 100/1000Mbps
Betriebssysteme:	Für alle Betriebssysteme geeignet	Operating systems:	Suitable for all operating systems
Ethernet Standards	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.3at Power over Ethernet Plus PSE IEEE 802.3af Power over Ethernet Plus	Ethernet Standards	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3x Full-Duplex Flow Control IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.3at Power over Ethernet Plus PSE IEEE 802.3af Power over Ethernet Plus
Forward & Filtering Rate:	14'880 pps (10Mbps) 148'800 pps (100Mbps) 1'488'000 pps (1000Mbps)	Forward & Filtering Rate:	14'880pps (10Mbps) 148'800pps (100Mbps) 1'488'000pps (1000Mbps)
Paketpuffer:	1 Mbits	Packet Buffer:	1Mbits
Paketlänge:	16 kbytes	Packet Length:	16kbytes
MAC-Adresstabelle:	2000 Einträge	MAC Address Table:	2000 entries
Switching Fabric:	10 Gbps/non-blocking	Switching Fabric:	10Gbps/non-blocking
Backplane Bandbreite:	14 Gbps	Backplane bandwidth:	14Gbps
Paket-Weiterleitungsrate:	14.88 Mpps	Packet forwarding rate:	14.88Mpps
Power Pin Belegung:	4/5(+), 7/8(-) , Mode / Alternative B	Power Pin Assignment:	4/5(+), 7/8(-) , Mode / Alternative B
PoE-Budget:	120 W (30 W pro Port)	PoE Budget:	120W (30W per port)
MTBF:	> 200'000 Stunden	MTBF:	> 200'000 hrs
Zulassungen:	EN55022:2010+AC: 2011, Class A EN 61000-3-2: 2006+A1: 2009+A2: 2009 EN 61000-3-3: 2013 EN55032:2017 IEC 61000-4-2: 2008 (ESD) IEC 61000-4-3: 2010 (RS) IEC 61000-4-4: 2012 (EFT) IEC 61000-4-5: 2014 (Überspannung) IEC 61000-4-6: 2013 (CS) IEC 61000-4-8: 2009 (PFMF)	Regulatory Approvals:	EN55022:2010+AC: 2011, Class A EN 61000-3-2: 2006+A1: 2009+A2: 2009 EN 61000-3-3: 2013 EN55032:2017 IEC 61000-4-2: 2008 (ESD) IEC 61000-4-3: 2010 (RS) IEC 61000-4-4: 2012 (EFT) IEC 61000-4-5: 2014 (Surge) IEC 61000-4-6: 2013 (CS) IEC 61000-4-8: 2009 (PFMF)
Betriebstemperatur :	-40°C bis +75°C Celsius	Operating temperature :	-40°F up to 176°F
Lagertemperatur:	-40°C bis +85°C Celsius	Storage temperature:	-40°F up to 185°F
Rel. Luftfeuchtigkeit:	5% bis 95%, nicht kondensierend	Rel. Humidity:	5% to 95%, non-condensing
Schutzklasse:	IP 40	Protection class:	IP 40
Stromversorgung:	2x +12V bis +48V (Terminal Block), redundant	Power Supply:	2x +12V to +48V (Terminal Block), redundant
Leistungsaufnahme:	<5 W (bei PoE-Verwendung: <120 W)	Power Consumption:	<5W (PoE in use: <120W)
Abmessung:	100.00 x 79.00 x 30.00 mm	Size:	100.00 x 79.00 x 30.00 mm
Gewicht:	250 g	Weight:	250 g
EAN:	4718359620348	EAN:	4718359620348
Ursprungsland:	China	Country of origin:	China
Lieferumfang:	EX-62030MPoE-SFP, DIN-Rail Kit (vormontiert), Wandmontage Kit, Handbuch	Packaging contents:	EX-62030MPoE-SFP, DIN-Rail Kit (pre-assembled), wall mounting kit, manual

Verwaltung

Management

Verwaltungsfunktion:	Web	Management Function:	Web
Redundanzprotokolle:	STP/RSTP	Redundancy Protocols:	STP/RSTP
Multicast-Unterstützung:	IGMP Snooping V1/V2/V3	Multicast Support:	IGMP Snooping V1/V2/V3
VLAN:	IEEE 802.1Q 4K VLAN	VLAN:	IEEE 802.1Q 4K VLAN
QOS:	Port 1Q ACL DSCP CVLAN SVLAN DA SA Port Priority Queue Weight	QOS:	Port 1Q ACL DSCP CVLAN SVLAN DA SA Port Priority Queue Weight
Diagnostische Wartung:	Port Mirroring Syslog Ping	Diagnostic Maintenance:	Port Mirroring Syslog Ping
Sicherheit:	Broadcast/Multicast Storm Protection MAC Filtering MAC Restriction	Security:	Broadcast/Multicast Storm Protection MAC Filtering MAC Restriction

Maße / Dimension

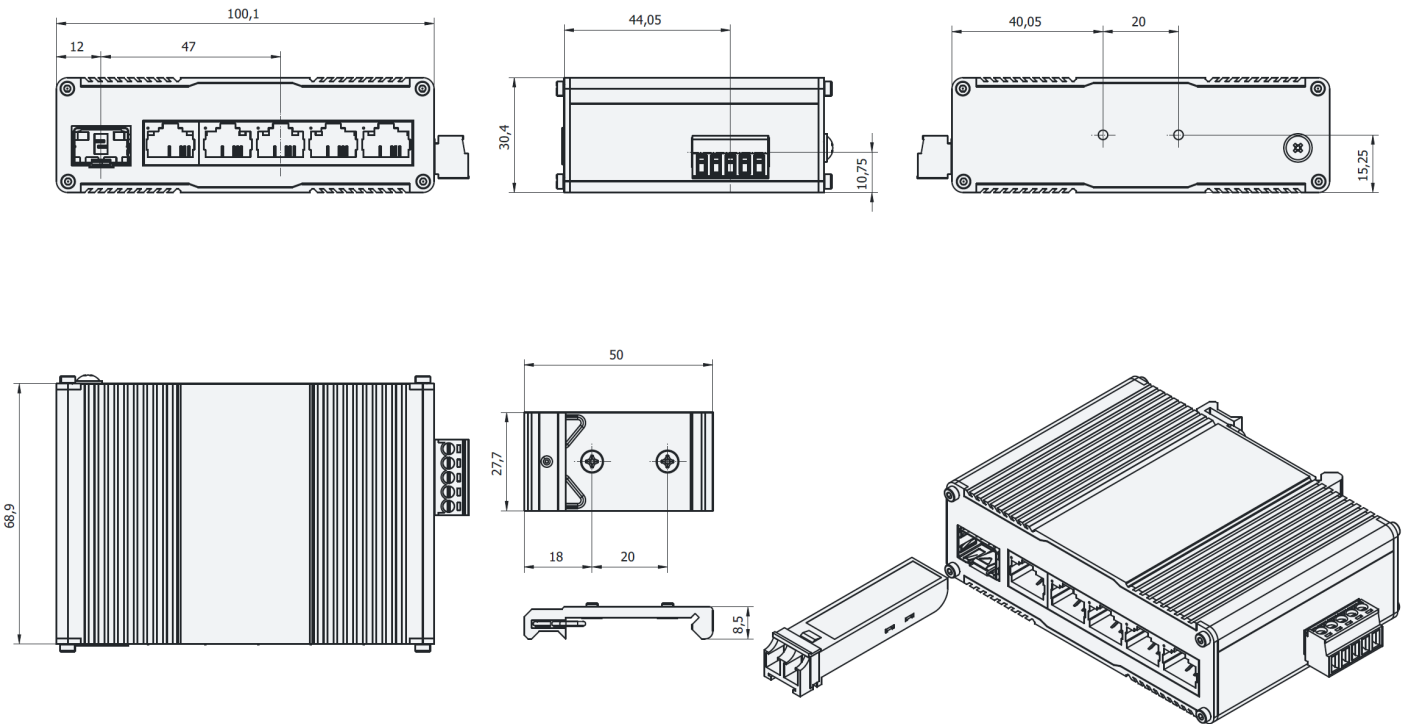

Bilder / Pictures



Zubehör / Accessories

EX-SFP-0055	SFP Transceiver	Duplex LC	Multimode	550/330 m	Operating Temperature: -40°C - +85°C
EX-SFP-2000	SFP Transceiver	Duplex LC	Singlemode	20 km	Operating Temperature: -40°C - +85°C
EX-6975	Netzteil / Power Supply	NDR-120-24	Output: DC 24V/5A/120W	Input: 90V - 264VAC	Operating Temperature: -20°C - +70°C
EX-6974	Netzteil / Power Supply	HDR-100-24	Output: DC 24V/3.83A/96W	Input: 85V - 264VAC	Operating Temperature: -30°C - +70°C
EX-K1110	Kabel / cable DC-Jack to Terminal Block				

EX-SFP-0055



EX-SFP-2000



EX-6975



EX-6974



EX-K1110

