


Bild / Picture

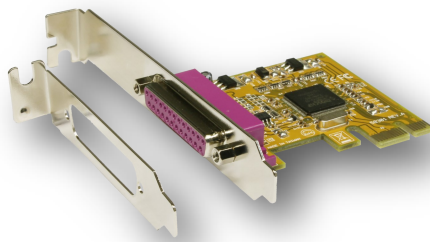

1P PCIe Parallel EPP/ECP Karte inkl. LP Bügel (ASIX Chip-Set)


Beschreibung

Die EX-44001 PCI-Express-Parallelkarte stellt einen parallelen SPP/EPP/ECP-High-Performance-Ausgang zur Verfügung. Die Karte wurde entwickelt, um einen weiteren parallelen Ausgang für PCs, kleine Workstations oder Server über den PCIe-Bus zu erweitern. Die EX-44001 löst Probleme mit IRQ und I/O-Adressen und ist PCIe-Plug-and-Play-kompatibel. Für schmale PC-Gehäuse ist ein Low-Profile-Bügel enthalten.

Merkmale

- PCI-Express x1 Parallel Karte mit einem Anschluss
- Schnittstelle: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port) ECP (Enhanced Capacity Port)
- I/O Adressen und Interrupt wird vom Betriebs System vergeben, IRQ Sharing
- PCIe Schnittstelle kompatibel zu Rev. 1.0a bis 3.0 Spezifikation
- Low Profile Bügel wird mitgeliefert

Anwendung / Application

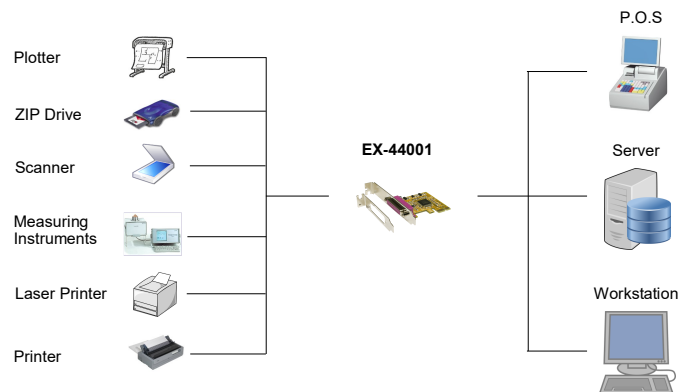

1P PCIe Parallel EPP/ECP board incl. LP bracket (ASIX Chip-Set)

Description

The EX-44001 PCI Express parallel card provides a parallel SPP/EPP/ECP high-performance output. The card is designed to add another parallel output for PCs, small workstations or servers via the PCIe bus. The EX-44001 solves problems with IRQ and I/O addresses and is PCIe plug-and-play compatible. A low-profile bracket is included for narrow PC housings.

Features

- PCI-Express x1 Parallel card with one port
- Interface: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port)
- I/O addresses and Interrupt setting from the operating system, IRQ sharing
- Fully compliant with PCIe Base Specification Rev. 1.0a to 3.0
- Low Profile its included

Spezifikation

Chip-Set:	ASIX MCS9901CV
Datentransfer-Rate:	2Mbyte/Sek.
Anschlüsse:	1 x 25 Pin D-SUB Parallel Buchse
Hardwaresysteme:	PCIe Slot x1 bis x16
Treiber:	Windows 7/ 8.x/10 /11 (32&64) Server 200x & 20xx, Linux 6.x/5.x/4.x/3.x/2.6.x
Betriebssysteme:	Gemäß Treiber
Betriebstemperatur :	0°C bis +55°C Celsius
Lagertemperatur:	-40°C bis +75°C Celsius
Rel. Luftfeuchtigkeit:	5% bis 95%
Stromversorgung:	+3.3Volt über den PCIe Slot
Abmessung:	65.00 x 58.00 mm
Gewicht:	200 g
EAN:	4718359440014
Ursprungsland:	Taiwan
Lieferumfang:	EX-44001, Low Profile Bügel, Treiber CD, Handbuch

Specification

Chip-Set:	ASIX MCS9901CV
Data transfer rate:	2Mbyte/Sec.
Connectors:	1 x 25 pin D-SUB female connector
Hardware system:	PCIe x1 to x16 slot
Driver:	Windows 7/ 8.x/10 /11 (32&64) Server 200x & 20xx, Linux 6.x/5.x/4.x/3.x/2.6.x
Operating systems:	In accordance with driver
Operating temperature :	32°F up to 131°F Fahrenheit
Storage temperature:	-40°F up to 167°F Fahrenheit
Rel. Humidity:	5% to 95%
Current Supply:	+3.3V over the PCIe slot
Size:	65.00 x 58.00 mm
Weight:	200 g
EAN:	4718359440014
Country of origin:	Taiwan
Packaging contents:	EX-44001, Low Profile bracket, Driver CD, Manual

System / OS



Geprüft / Approved



Verpackung / Packaging

